


Electrical connections EC

L5)

Technical features:

- PFC (passive)
- Integrated PID controller
- Control input 0-10 VDC or 4-20 mA
- Input for sensor 0-10 V or 4-20 mA
- Slave output 0-10 V max. 5 mA
- Output 20 VDC ($\pm 25\%$ / -10%) max. 50 mA
- Output 10 VDC ($+3\%$) max. 10 mA
- RS485 MODBUS
- Motor current limitation, alarm relay
- Line undervoltage / phase failure detection
- Electronics / motor overtemperature protection
- Locked-rotor protection, soft start
- Digital inputs for day/night switch, enabling, cooling / heating

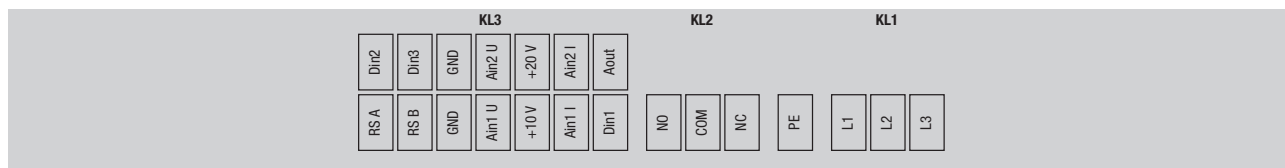

Connector	Connection	Assignment / function
KL1	L3	Mains; L3
	L2	Mains; L2
	L1	Mains; L1
PE	PE	Protective earth
KL2	NC	Alarm relay, break for failure
	COM	Alarm relay, COMMON (2A, 250 VAC, AC1)
	NO	Alarm relay, make for failure

Connector	Connection	Assignment / function
KL3	Din1	Digital input 1 (enabling / disabling of electronics),, Enabling: Pin open or applied voltage 5...50 VDC Disabling: Bridge to GND or applied voltage < 1 VDC
	Ain1 I	Analogue set value input, 4-20 mA (impedance 100 Ω), only to be used as alternative to terminal Ain1 U
	+10 V	Supply for external potentiometer, 10 VDC ($\pm 3\%$) max. 10 mA
	Ain1U	Analogue set value input, 0-10 V (impedance 100 k Ω), only to be used as alternative to terminal Ain1 I
	GND	GND
	RSB	RS485 interface for MODBUS RTU; RS B
	RSA	RS485 interface for MODBUS RTU; RS A
	Aout	Analogue output 0-10 V max. 5 mA, reading of current motor speed / current motor control factor
	Ain2 I	Analogue actual value input, 4-20mA (impedance 100 Ω), only to be used as alternative to terminal Ain2 U
	+20 V	Supply for external sensor, 20 VDC ($+25\%$ / -10%) max. 40 mA
	Ain2 U	Analogue actual value input, 0-10 V (impedance 100 k Ω), only to be used as alternative to terminal Ain2 I
	GND	GND
	Din3	Digital input 3 (switch Normal / Inverse), The preset effective direction of the integrated controller can be selected via BUS or via digital input Normal/Inverse. Normal: Pin open or applied voltage 5...50 VDC Inverse: Bridge to GND or applied voltage < 1 VDC
	Din2	Digital input 2 (switch Day / Night), The preset set of parameters can be selected via BUS or via digital input Day/Night. Day: Pin open or applied voltage 5...50 VDC Night: Bridge to GND or applied voltage < 1 VDC